

# RL5416

Compression Canister (Type F)

## Specifications

### Full Scale Output:

2,0 mV/V

### Output Resistance:

1003 ohms,  $\pm 3$

### Input Resistance:

1150 ohms,  $\pm 3$

### Material Finish:

Alloy steel

### Compensated Temperature:

-10° C to 40° C

### Operating Temperature:

-10° C to 70° C

### Seal Type:

IP68

### Rated Excitation:

15V

### Insulation Resistance:

>5,000 megohms

### Cable Length:

15m

### Cable Construction:

PVC

### Cable Color Code:

Blue .....+ Excitation  
Black .....- Excitation  
White .....+ Signal  
Red .....- Signal

### Warranty:

Two-year limited warranty

### Approvals:



C3/C4



Optional

Class C3 and C4 available




Picture is a representation of actual product

## Order Information

LOAD RATING	PART #
10 t	168092
15 t	168093
20 t	168094
25 t	168095
30 t	168097
35 t	168098
40 t	168099
50 t	168090

Note: Refer to page 233 for load cell mount information

## Dimensions

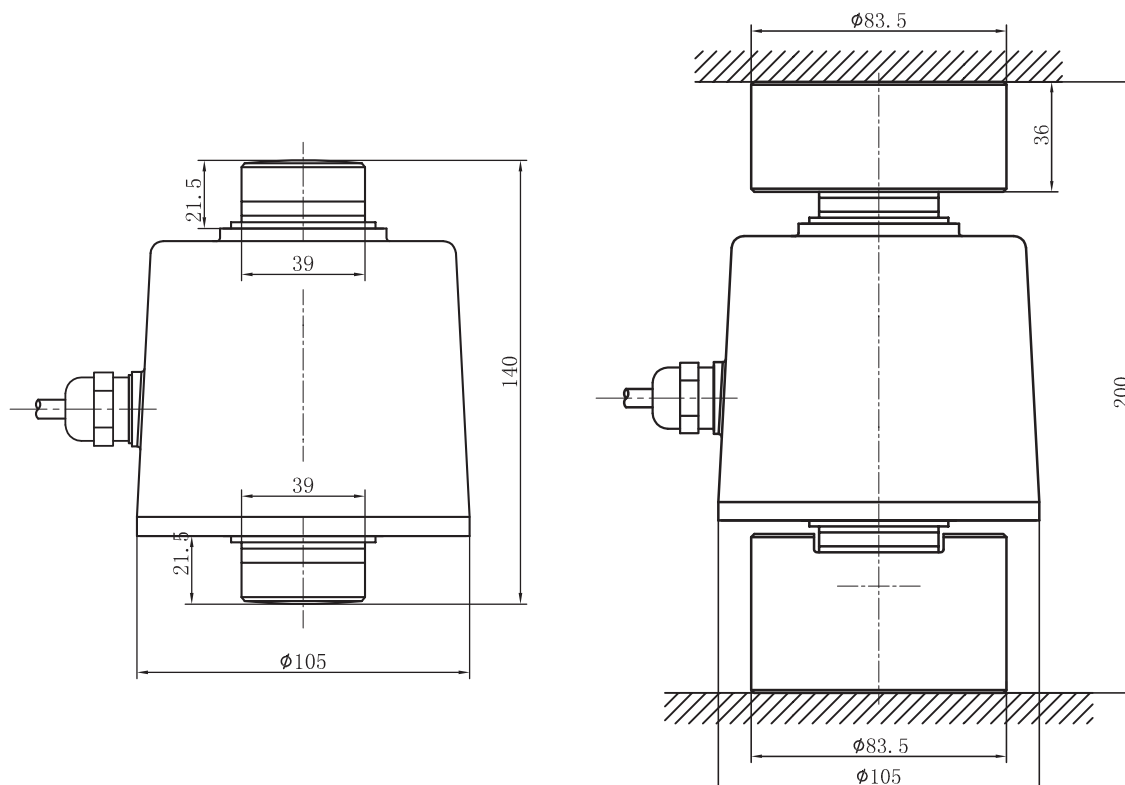

LOAD CELLS

www.ricelake.eu | Phone: +31 (0) 26 472 1319

RICE LAKE